

**ZYNQ UltraScale+ FPGA  
Core Board  
ACU7EVC  
User Manual**



## Version Record

| Version | Date       | Description   |
|---------|------------|---------------|
| Rev 1.0 | 2022-08-30 | First Release |

# CONTENTS

|  |    |
|--|----|
| Version Record .....                                     | 2  |
| Part 1: ACU7EVC Core Board .....                         | 4  |
| Part 1.1: ACU7EVC Core Board Introduction .....          | 4  |
| Part 1.2: ZYNQ Chip .....                                | 5  |
| Part 1.3: DDR4 DRAM .....                                | 7  |
| Part 1.4: QSPI Flash .....                               | 16 |
| Part 1.5: eMMC Flash .....                               | 17 |
| Part 1.6: Clock Configuration .....                      | 19 |
| Part 1.7: Power Supply .....                             | 19 |
| Part 1.8: ACU7EVC Core Board Size Dimension .....        | 21 |
| Part 1.9: Board to Board Connectors pin assignment ..... | 21 |

# Part 1: ACU7EVC Core Board

## Part 1.1: ACU7EVC Core Board Introduction

ACU7EVC (core board model, the same below) FPGA core board, ZYNQ chip is based on XCZU7EV-2FFVB1156I of XILINX company Zynq UltraScale+ MPSoCs EG Family.

This core board uses 8 Micron DDR4 chips MT40A512M16GE, of which 4 DDR4 chips are mounted on the PS side to form a 64-bit data bus bandwidth and 4GB capacity. 4 DDR4 chip is mounted on the PL end, which is a 64-bit data bus width and a capacity of 4GB. The highest operating speed of DDR4 SDRAM on the PS side can reach 1200MHz (data rate 2400Mbps), and the highest operating speed of DDR4 SDRAM on the PL side can reach 1200MHz (data rate 2400Mbps). In addition, two 256MBit QSPI FLASH and an 8GB eMMC FLASH chip are also integrated on the core board to start storage configuration and system files.

In order to connect with the carrier board, the four board-to-board connectors of this core board expand the PS side USB2.0 interface, Gigabit Ethernet interface, SD card interface and other remaining MIO ports; also expand 4 pairs of PS MGT high-speed transceiver interface; and 16 GTH transceivers and almost all IO ports on the PL side (HP I/O: 143, HD I/O: 46). The wiring between the XCZU7EV chip and the interface has been processed with equal length and differential, and the core board size is only 3.15\*2.36 (inch), which is very suitable for secondary development.



Figure 2-1-1: ACU7EVC Core Board (Front View)

## Part 1.2: ZYNQ Chip

The FPGA core board ACU7EVC uses Xilinx's Zynq UltraScale+ MPSoCs EV family chip, module XCZU7EV-2FFVB1156I. The PS system of the ZU7EV chip integrates 4 ARM Cortex™-A53 processors with a speed of up to 1.3Ghz and supports Level 2 Cache; it also contains 2 Cortex-R5 processors with a speed of up to 533Mhz

The ZU7EV chip supports 32-bit or 64-bit DDR4, LPDDR4, DDR3, DDR3L, LPDDR3 memory chips, with rich high-speed interfaces on the PS side such as PCIE Gen2, USB3.0, SATA 3.1, DisplayPort; it also supports USB2.0, Gigabit Ethernet, SD/SDIO, I2C, CAN, UART, GPIO and other interfaces. The PL end contains a wealth of programmable logic units, DSP and internal RAM. .

Figure 2-2-1 detailed the Overall Block Diagram of the ZU7EV Chip.

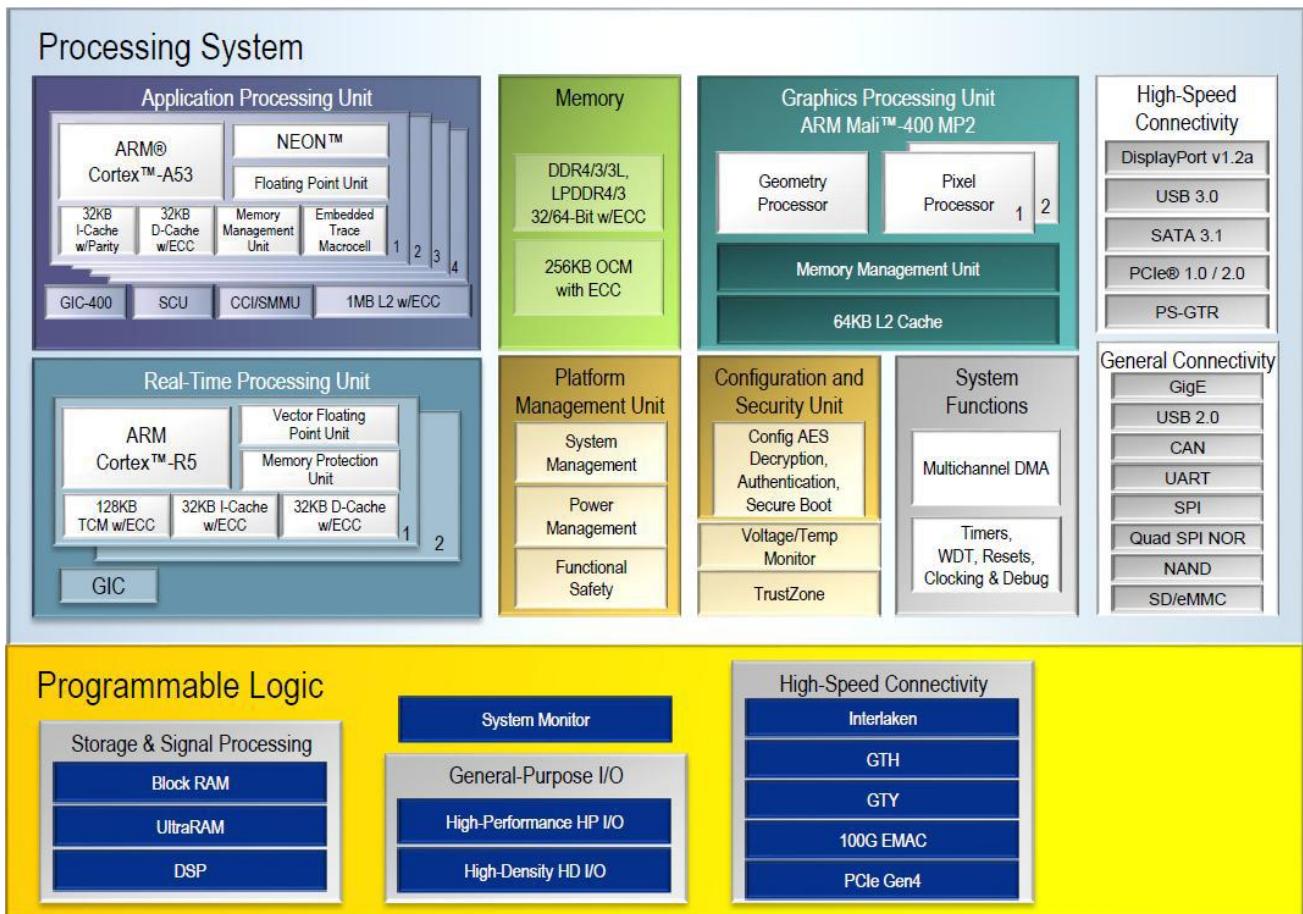


Figure 2-2-1: Overall Block Diagram of the ZYNQ ZU7EV Chip

### The main parameters of the PS system part are as follows:

- ARM quad-core Cortex™-A53 processor, speed up to 1.3GHz, each CPU 32KB level 1 instruction and data cache, 1MB level 2 cache, shared by 2 CPUs
- ARM dual-core Cortex-R5 processor, speed up to 533MHz, each CPU 32KB level 1 instruction and data cache, and 128K tightly coupled memory.
- Image video processor Mali-400 MP2, speed up to 677MHz, 64KB level 2 cache.
- External storage interface, support 32/64bit DDR4/3/3L, LPDDR4/3

interface

- Static storage interface, support NAND, 2xQuad-SPI FLASH.
- High-speed connection interface, support PCIe Gen2 x 4, 2 x USB3.0, Sata 3.1, Display Port, 4 x Tri-mode, Gigabit Ethernet
- Common connection interfaces: 2 x USB2.0, 2 x SD/SDIO, 2 x UART, 2 x CAN 2.0B, 2 x I2C, 2 x SPI, 4 x 32b GPIO
- Power management: Support the four-part division of power supply Full/Low/PL/Battery
- Encryption algorithm: support RSA, AES and SHA.
- System monitoring: 10-bit 1Mbps AD sampling for temperature and voltage detection.

### **The main parameters of the PL logic part are as follows:**

- Logic Cells: 504K
- CLB Flip-flops: 460.8K
- Look-up-tables (LUTs): 230.4K
- Block RAM: 11Mb
- Clock Management Units (CMTs): 8
- DSP Slices: 1728

## **Part 1.3: DDR4 DRAM**

The ACU7EVC core board is equipped with 8 Micron (Micron) 1GB DDR4 chips, model MT40A512M16LY-062E, of which 4 DDR4 chips are mounted on the PS side to form a 64-bit data bus bandwidth and 4GB capacity. Four DDR4 chip is mounted on the PL end, which is a 64-bit data bus width and a capacity of 4GB. The maximum operating speed of the DDR4 SDRAM on the PS side can reach 1200MHz (data rate 2400Mbps), and the 4 DDR4 storage systems are directly connected to the memory interface of the PS BANK504. The highest operating speed of the DDR4 SDRAM on the PL side can reach

1200MHz (data rate 2400Mbps), and four piece of DDR4 is connected to the BANK66,67,68 interface of the FPGA. The specific configuration of DDR4 SDRAM is shown in Table 2-3-1 below:

| Position | Bit Number      | Chip Model         | Capacity     | Factory |
|----------|-----------------|--------------------|--------------|---------|
| PS       | U4,U5,U6,U7     | MT40A512M16LY-062E | 512M x 16bit | Micron  |
| PL       | U17,U19,U45,U46 | MT40A512M16LY-062E | 512M x 16bit | Micron  |

Table 2-3-1: DDR4 SDRAM Configuration

The hardware design of DDR4 requires strict consideration of signal integrity. We have fully considered the matching resistor/terminal resistance, trace impedance control, and trace length control in circuit design and PCB design to ensure high-speed and stable operation of DDR4.

The hardware connection of DDR4 SDRAM on the PS Side is shown in Figure 2-3-1:

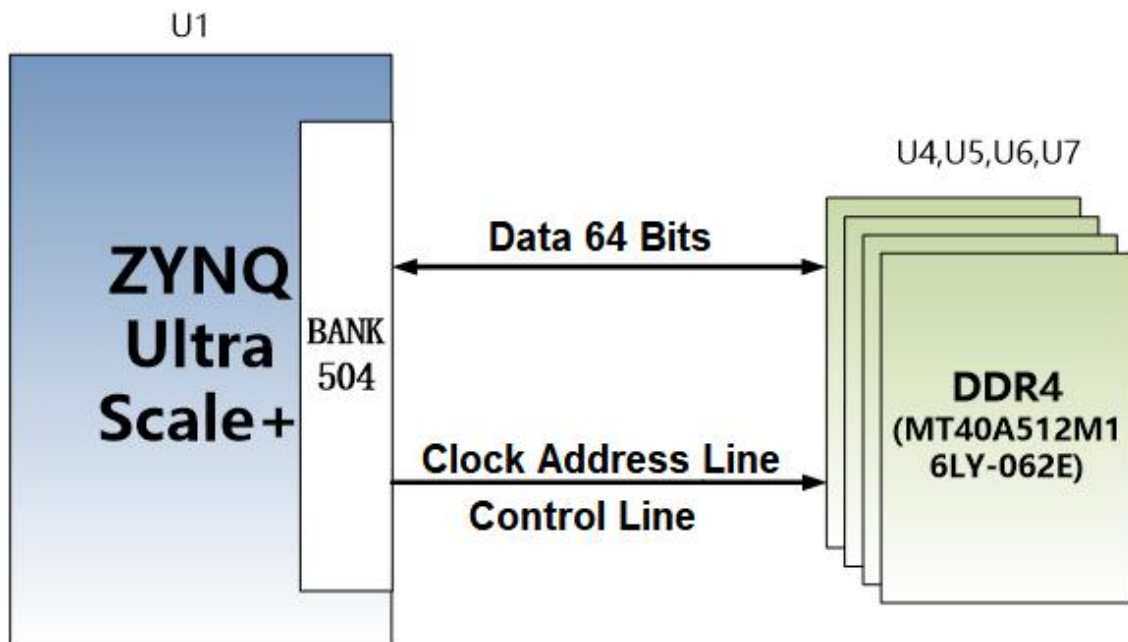


Figure 2-3-1: DDR3 DRAM schematic diagram

The hardware connection of DDR4 SDRAM on the PL Side is shown in Figure 2-3-2:



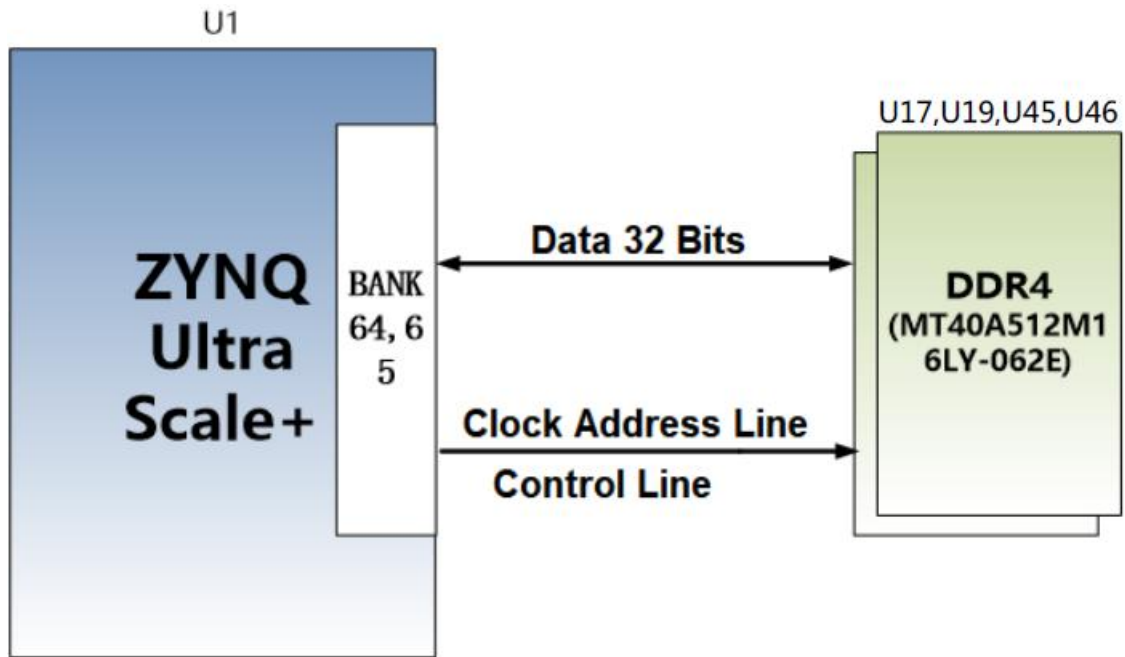


Figure 2-3-2: DDR4 DRAM schematic diagram

### PS Side DDR4 DRAM pin assignment:

| Signal Name    | Pin Name          | Pin Number |
|----------------|-------------------|------------|
| PS_DDR4_DQS0_N | PS_DDR_DQS_N0_504 | AN27       |
| PS_DDR4_DQS0_P | PS_DDR_DQS_P0_504 | AN26       |
| PS_DDR4_DQS1_N | PS_DDR_DQS_N1_504 | AP30       |
| PS_DDR4_DQS1_P | PS_DDR_DQS_P1_504 | AN29       |
| PS_DDR4_DQS2_N | PS_DDR_DQS_N2_504 | AJ26       |
| PS_DDR4_DQS2_P | PS_DDR_DQS_P2_504 | AH26       |
| PS_DDR4_DQS3_N | PS_DDR_DQS_N3_504 | AK29       |
| PS_DDR4_DQS3_P | PS_DDR_DQS_P3_504 | AK28       |
| PS_DDR4_DQS4_N | PS_DDR_DQS_N4_504 | AD31       |
| PS_DDR4_DQS4_P | PS_DDR_DQS_P4_504 | AD30       |
| PS_DDR4_DQS5_N | PS_DDR_DQS_N5_504 | Y28        |
| PS_DDR4_DQS5_P | PS_DDR_DQS_P5_504 | Y27        |
| PS_DDR4_DQS6_N | PS_DDR_DQS_N6_504 | AB34       |
| PS_DDR4_DQS6_P | PS_DDR_DQS_P6_504 | AB33       |
| PS_DDR4_DQS7_N | PS_DDR_DQS_N7_504 | W32        |
| PS_DDR4_DQS7_P | PS_DDR_DQS_P7_504 | W31        |

|              |                 |      |
|--------------|-----------------|------|
| PS_DDR4_DQ0  | PS_DDR_DQ0_504  | AP27 |
| PS_DDR4_DQ1  | PS_DDR_DQ1_504  | AP25 |
| PS_DDR4_DQ2  | PS_DDR_DQ2_504  | AP26 |
| PS_DDR4_DQ3  | PS_DDR_DQ3_504  | AM26 |
| PS_DDR4_DQ4  | PS_DDR_DQ4_504  | AP24 |
| PS_DDR4_DQ5  | PS_DDR_DQ5_504  | AL25 |
| PS_DDR4_DQ6  | PS_DDR_DQ6_504  | AM25 |
| PS_DDR4_DQ7  | PS_DDR_DQ7_504  | AM24 |
| PS_DDR4_DQ8  | PS_DDR_DQ8_504  | AM28 |
| PS_DDR4_DQ9  | PS_DDR_DQ9_504  | AN28 |
| PS_DDR4_DQ10 | PS_DDR_DQ10_504 | AP29 |
| PS_DDR4_DQ11 | PS_DDR_DQ11_504 | AP28 |
| PS_DDR4_DQ12 | PS_DDR_DQ12_504 | AM31 |
| PS_DDR4_DQ13 | PS_DDR_DQ13_504 | AP31 |
| PS_DDR4_DQ14 | PS_DDR_DQ14_504 | AN31 |
| PS_DDR4_DQ15 | PS_DDR_DQ15_504 | AM30 |
| PS_DDR4_DQ16 | PS_DDR_DQ16_504 | AF25 |
| PS_DDR4_DQ17 | PS_DDR_DQ17_504 | AG25 |
| PS_DDR4_DQ18 | PS_DDR_DQ18_504 | AG26 |
| PS_DDR4_DQ19 | PS_DDR_DQ19_504 | AJ25 |
| PS_DDR4_DQ20 | PS_DDR_DQ20_504 | AG24 |
| PS_DDR4_DQ21 | PS_DDR_DQ21_504 | AK25 |
| PS_DDR4_DQ22 | PS_DDR_DQ22_504 | AJ24 |
| PS_DDR4_DQ23 | PS_DDR_DQ23_504 | AK24 |
| PS_DDR4_DQ24 | PS_DDR_DQ24_504 | AH28 |
| PS_DDR4_DQ25 | PS_DDR_DQ25_504 | AH27 |
| PS_DDR4_DQ26 | PS_DDR_DQ26_504 | AJ27 |
| PS_DDR4_DQ27 | PS_DDR_DQ27_504 | AK27 |
| PS_DDR4_DQ28 | PS_DDR_DQ28_504 | AL26 |
| PS_DDR4_DQ29 | PS_DDR_DQ29_504 | AL27 |
| PS_DDR4_DQ30 | PS_DDR_DQ30_504 | AH29 |
| PS_DDR4_DQ31 | PS_DDR_DQ31_504 | AL28 |
| PS_DDR4_DQ32 | PS_DDR_DQ32_504 | AB29 |
| PS_DDR4_DQ33 | PS_DDR_DQ33_504 | AB30 |
| PS_DDR4_DQ34 | PS_DDR_DQ34_504 | AC29 |
| PS_DDR4_DQ35 | PS_DDR_DQ35_504 | AD32 |

|              |                 |      |
|--------------|-----------------|------|
| PS_DDR4_DQ36 | PS_DDR_DQ36_504 | AC31 |
| PS_DDR4_DQ37 | PS_DDR_DQ37_504 | AE30 |
| PS_DDR4_DQ38 | PS_DDR_DQ38_504 | AC28 |
| PS_DDR4_DQ39 | PS_DDR_DQ39_504 | AE29 |
| PS_DDR4_DQ40 | PS_DDR_DQ40_504 | AC27 |
| PS_DDR4_DQ41 | PS_DDR_DQ41_504 | AA27 |
| PS_DDR4_DQ42 | PS_DDR_DQ42_504 | AA28 |
| PS_DDR4_DQ43 | PS_DDR_DQ43_504 | AB28 |
| PS_DDR4_DQ44 | PS_DDR_DQ44_504 | W27  |
| PS_DDR4_DQ45 | PS_DDR_DQ45_504 | W29  |
| PS_DDR4_DQ46 | PS_DDR_DQ46_504 | W28  |
| PS_DDR4_DQ47 | PS_DDR_DQ47_504 | V27  |
| PS_DDR4_DQ48 | PS_DDR_DQ48_504 | AA32 |
| PS_DDR4_DQ49 | PS_DDR_DQ49_504 | AA33 |
| PS_DDR4_DQ50 | PS_DDR_DQ50_504 | AA34 |
| PS_DDR4_DQ51 | PS_DDR_DQ51_504 | AE34 |
| PS_DDR4_DQ52 | PS_DDR_DQ52_504 | AD34 |
| PS_DDR4_DQ53 | PS_DDR_DQ53_504 | AB31 |
| PS_DDR4_DQ54 | PS_DDR_DQ54_504 | AC34 |
| PS_DDR4_DQ55 | PS_DDR_DQ55_504 | AC33 |
| PS_DDR4_DQ56 | PS_DDR_DQ56_504 | AA30 |
| PS_DDR4_DQ57 | PS_DDR_DQ57_504 | Y30  |
| PS_DDR4_DQ58 | PS_DDR_DQ58_504 | AA31 |
| PS_DDR4_DQ59 | PS_DDR_DQ59_504 | W30  |
| PS_DDR4_DQ60 | PS_DDR_DQ60_504 | Y33  |
| PS_DDR4_DQ61 | PS_DDR_DQ61_504 | W33  |
| PS_DDR4_DQ62 | PS_DDR_DQ62_504 | W34  |
| PS_DDR4_DQ63 | PS_DDR_DQ63_504 | Y34  |
| PS_DDR4_DM0  | PS_DDR_DM0_504  | AN24 |
| PS_DDR4_DM1  | PS_DDR_DM1_504  | AM29 |
| PS_DDR4_DM2  | PS_DDR_DM2_504  | AH24 |
| PS_DDR4_DM3  | PS_DDR_DM3_504  | AJ29 |
| PS_DDR4_DM4  | PS_DDR_DM4_504  | AD29 |
| PS_DDR4_DM5  | PS_DDR_DM5_504  | Y29  |
| PS_DDR4_DM6  | PS_DDR_DM6_504  | AC32 |
| PS_DDR4_DM7  | PS_DDR_DM7_504  | Y32  |

|                 |                      |      |
|-----------------|----------------------|------|
| PS_DDR4_A0      | PS_DDR_A0_504        | AN34 |
| PS_DDR4_A1      | PS_DDR_A1_504        | AM34 |
| PS_DDR4_A2      | PS_DDR_A2_504        | AM33 |
| PS_DDR4_A3      | PS_DDR_A3_504        | AL34 |
| PS_DDR4_A4      | PS_DDR_A4_504        | AL33 |
| PS_DDR4_A5      | PS_DDR_A5_504        | AK33 |
| PS_DDR4_A6      | PS_DDR_A6_504        | AK30 |
| PS_DDR4_A7      | PS_DDR_A7_504        | AJ30 |
| PS_DDR4_A8      | PS_DDR_A8_504        | AJ31 |
| PS_DDR4_A9      | PS_DDR_A9_504        | AH31 |
| PS_DDR4_A10     | PS_DDR_A10_504       | AG31 |
| PS_DDR4_A11     | PS_DDR_A11_504       | AF31 |
| PS_DDR4_A12     | PS_DDR_A12_504       | AG30 |
| PS_DDR4_A13     | PS_DDR_A13_504       | AF30 |
| PS_DDR4_ODT0    | PS_DDR_ODT0_504      | AP32 |
| PS_DDR4_PARITY  | PS_DDR_PARITY_504    | AA26 |
| PS_DDR4_RAS_B   | PS_DDR_A16_504       | AF28 |
| PS_DDR4_RESET_B | PS_DDR_RAM_RST_N_504 | AD26 |
| PS_DDR4_WE_B    | PS_DDR_A14_504       | AG29 |
| PS_DDR4_ACT_B   | PS_DDR_ACT_N_504     | AE25 |
| PS_DDR4_ALERT_B | PS_DDR_ALERT_N_504   | AB26 |
| PS_DDR4_BA0     | PS_DDR_BA0_504       | AE27 |
| PS_DDR4_BA1     | PS_DDR_BA1_504       | AE28 |
| PS_DDR4_BG0     | PS_DDR_BG0_504       | AD27 |
| PS_DDR4_CAS_B   | PS_DDR_A15_504       | AG28 |
| PS_DDR4_CKE0    | PS_DDR_CKE0_504      | AN33 |
| PS_DDR4_CS0_B   | PS_DDR_CS_N0_504     | AP33 |
| PS_DDR4_CLK0_N  | PS_DDR_CK_N0_504     | AN32 |
| PS_DDR4_CLK0_P  | PS_DDR_CK0_504       | AL31 |

### PL Side DDR4 DRAM pin assignment:

| Signal Name    | Pin Name                   | Pin Number |
|----------------|----------------------------|------------|
| PL_DDR4_DQS0_N | IO_L10N_T1U_N7_QBC_AD4N_67 | F13        |
| PL_DDR4_DQS0_P | IO_L10P_T1U_N6_QBC_AD4P_67 | G14        |
| PL_DDR4_DQS1_N | IO_L4N_T0U_N7_DBC_AD7N_67  | B13        |

|                |                            |     |
|----------------|----------------------------|-----|
| PL_DDR4_DQS1_P | IO_L4P_T0U_N6_DBC_AD7P_67  | B14 |
| PL_DDR4_DQS2_N | IO_L16N_T2U_N7_QBC_AD3N_67 | H17 |
| PL_DDR4_DQS2_P | IO_L16P_T2U_N6_QBC_AD3P_67 | H18 |
| PL_DDR4_DQS3_N | IO_L22N_T3U_N7_DBC_AD0N_67 | K15 |
| PL_DDR4_DQS3_P | IO_L22P_T3U_N6_DBC_AD0P_67 | L15 |
| PL_DDR4_DQS4_N | IO_L16N_T2U_N7_QBC_AD3N_68 | D10 |
| PL_DDR4_DQS4_P | IO_L16P_T2U_N6_QBC_AD3P_68 | D11 |
| PL_DDR4_DQS5_N | IO_L22N_T3U_N7_DBC_AD0N_68 | A10 |
| PL_DDR4_DQS5_P | IO_L22P_T3U_N6_DBC_AD0P_68 | B10 |
| PL_DDR4_DQS6_N | IO_L10N_T1U_N7_QBC_AD4N_68 | D9  |
| PL_DDR4_DQS6_P | IO_L10P_T1U_N6_QBC_AD4P_68 | E9  |
| PL_DDR4_DQS7_N | IO_L4N_T0U_N7_DBC_AD7N_68  | J11 |
| PL_DDR4_DQS7_P | IO_L4P_T0U_N6_DBC_AD7P_68  | K12 |
| PL_DDR4_DQ0    | IO_L9N_T1L_N5_AD12N_67     | E17 |
| PL_DDR4_DQ1    | IO_L11P_T1U_N8_GC_67       | D15 |
| PL_DDR4_DQ2    | IO_L8P_T1L_N2_AD5P_67      | D17 |
| PL_DDR4_DQ3    | IO_L12N_T1U_N11_GC_67      | E14 |
| PL_DDR4_DQ4    | IO_L9P_T1L_N4_AD12P_67     | E18 |
| PL_DDR4_DQ5    | IO_L11N_T1U_N9_GC_67       | D14 |
| PL_DDR4_DQ6    | IO_L12P_T1U_N10_GC_67      | E15 |
| PL_DDR4_DQ7    | IO_L8N_T1L_N3_AD5N_67      | C17 |
| PL_DDR4_DQ8    | IO_L2P_T0L_N2_67           | B16 |
| PL_DDR4_DQ9    | IO_L6P_T0U_N10_AD6P_67     | C13 |
| PL_DDR4_DQ10   | IO_L3P_T0L_N4_AD15P_67     | A15 |
| PL_DDR4_DQ11   | IO_L5P_T0U_N8_AD14P_67     | A13 |
| PL_DDR4_DQ12   | IO_L2N_T0L_N3_67           | B15 |
| PL_DDR4_DQ13   | IO_L5N_T0U_N9_AD14N_67     | A12 |
| PL_DDR4_DQ14   | IO_L3N_T0L_N5_AD15N_67     | A14 |
| PL_DDR4_DQ15   | IO_L6N_T0U_N11_AD6N_67     | C12 |
| PL_DDR4_DQ16   | IO_L15P_T2L_N4_AD11P_67    | H19 |
| PL_DDR4_DQ17   | IO_L18P_T2U_N10_AD2P_67    | H16 |
| PL_DDR4_DQ18   | IO_L17P_T2U_N8_AD10P_67    | G18 |
| PL_DDR4_DQ19   | IO_L18N_T2U_N11_AD2N_67    | G16 |
| PL_DDR4_DQ20   | IO_L15N_T2L_N5_AD11N_67    | G19 |
| PL_DDR4_DQ21   | IO_L14N_T2L_N3_GC_67       | F15 |
| PL_DDR4_DQ22   | IO_L17N_T2U_N9_AD10N_67    | F18 |

|              |                         |     |
|--------------|-------------------------|-----|
| PL_DDR4_DQ23 | IO_L14P_T2L_N2_GC_67    | G15 |
| PL_DDR4_DQ24 | IO_L24N_T3U_N11_67      | L16 |
| PL_DDR4_DQ25 | IO_L21N_T3L_N5_AD8N_67  | J17 |
| PL_DDR4_DQ26 | IO_L23P_T3U_N8_67       | K19 |
| PL_DDR4_DQ27 | IO_L21P_T3L_N4_AD8P_67  | K17 |
| PL_DDR4_DQ28 | IO_L24P_T3U_N10_67      | L17 |
| PL_DDR4_DQ29 | IO_L20P_T3L_N2_AD1P_67  | J16 |
| PL_DDR4_DQ30 | IO_L23N_T3U_N9_67       | K18 |
| PL_DDR4_DQ31 | IO_L20N_T3L_N3_AD1N_67  | J15 |
| PL_DDR4_DQ32 | IO_L18N_T2U_N11_AD2N_68 | C11 |
| PL_DDR4_DQ33 | IO_L17P_T2U_N8_AD10P_68 | F12 |
| PL_DDR4_DQ34 | IO_L17N_T2U_N9_AD10N_68 | E12 |
| PL_DDR4_DQ35 | IO_L14P_T2L_N2_GC_68    | F11 |
| PL_DDR4_DQ36 | IO_L18P_T2U_N10_AD2P_68 | D12 |
| PL_DDR4_DQ37 | IO_L15N_T2L_N5_AD11N_68 | H12 |
| PL_DDR4_DQ38 | IO_L15P_T2L_N4_AD11P_68 | H13 |
| PL_DDR4_DQ39 | IO_L14N_T2L_N3_GC_68    | E10 |
| PL_DDR4_DQ40 | IO_L20N_T3L_N3_AD1N_68  | B8  |
| PL_DDR4_DQ41 | IO_L21N_T3L_N5_AD8N_68  | A6  |
| PL_DDR4_DQ42 | IO_L20P_T3L_N2_AD1P_68  | B9  |
| PL_DDR4_DQ43 | IO_L23N_T3U_N9_68       | A7  |
| PL_DDR4_DQ44 | IO_L24P_T3U_N10_68      | B11 |
| PL_DDR4_DQ45 | IO_L21P_T3L_N4_AD8P_68  | B6  |
| PL_DDR4_DQ46 | IO_L24N_T3U_N11_68      | A11 |
| PL_DDR4_DQ47 | IO_L23P_T3U_N8_68       | A8  |
| PL_DDR4_DQ48 | IO_L12P_T1U_N10_GC_68   | G10 |
| PL_DDR4_DQ49 | IO_L9P_T1L_N4_AD12P_68  | F8  |
| PL_DDR4_DQ50 | IO_L8N_T1L_N3_AD5N_68   | C8  |
| PL_DDR4_DQ51 | IO_L9N_T1L_N5_AD12N_68  | E8  |
| PL_DDR4_DQ52 | IO_L12N_T1U_N11_GC_68   | F10 |
| PL_DDR4_DQ53 | IO_L11P_T1U_N8_GC_68    | H9  |
| PL_DDR4_DQ54 | IO_L8P_T1L_N2_AD5P_68   | C9  |
| PL_DDR4_DQ55 | IO_L11N_T1U_N9_GC_68    | G9  |
| PL_DDR4_DQ56 | IO_L5N_T0U_N9_AD14N_68  | J14 |
| PL_DDR4_DQ57 | IO_L6N_T0U_N11_AD6N_68  | K13 |
| PL_DDR4_DQ58 | IO_L5P_T0U_N8_AD14P_68  | K14 |

|               |                            |      |
|---------------|----------------------------|------|
| PL_DDR4_DQ59  | IO_L2P_T0L_N2_68           | K10  |
| PL_DDR4_DQ60  | IO_L6P_T0U_N10_AD6P_68     | L14  |
| PL_DDR4_DQ61  | IO_L3P_T0L_N4_AD15P_68     | L12  |
| PL_DDR4_DQ62  | IO_L2N_T0L_N3_68           | J10  |
| PL_DDR4_DQ63  | IO_L3N_T0L_N5_AD15N_68     | L11  |
| PL_DDR4_DM0   | IO_L7P_T1L_N0_QBC_AD13P_67 | D16  |
| PL_DDR4_DM1   | IO_L1P_T0L_N0_DBC_67       | A17  |
| PL_DDR4_DM2   | IO_L13P_T2L_N0_GC_QBC_67   | F17  |
| PL_DDR4_DM3   | IO_L19P_T3L_N0_DBC_AD9P_67 | L20  |
| PL_DDR4_DM4   | IO_L13P_T2L_N0_GC_QBC_68   | H11  |
| PL_DDR4_DM5   | IO_L19P_T3L_N0_DBC_AD9P_68 | C7   |
| PL_DDR4_DM6   | IO_L7P_T1L_N0_QBC_AD13P_68 | F7   |
| PL_DDR4_DM7   | IO_L1P_T0L_N0_DBC_68       | M13  |
| PL_DDR4_A0    | IO_L10P_T1U_N6_QBC_AD4P_66 | AK8  |
| PL_DDR4_A1    | IO_L6P_T0U_N10_AD6P_66     | AM9  |
| PL_DDR4_A2    | IO_L10N_T1U_N7_QBC_AD4N_66 | AL8  |
| PL_DDR4_A3    | IO_L5N_T0U_N9_AD14N_66     | AM10 |
| PL_DDR4_A4    | IO_L11N_T1U_N9_GC_66       | AK10 |
| PL_DDR4_A5    | IO_L3N_T0L_N5_AD15N_66     | AP11 |
| PL_DDR4_A6    | IO_L14N_T2L_N3_GC_66       | AJ11 |
| PL_DDR4_A7    | IO_L4P_T0U_N6_DBC_AD7P_66  | AN9  |
| PL_DDR4_A8    | IO_L17N_T2U_N9_AD10N_66    | AG10 |
| PL_DDR4_A9    | IO_L6N_T0U_N11_AD6N_66     | AM8  |
| PL_DDR4_A10   | IO_L11P_T1U_N8_GC_66       | AJ10 |
| PL_DDR4_A11   | IO_L5P_T0U_N8_AD14P_66     | AM11 |
| PL_DDR4_A12   | IO_L9N_T1L_N5_AD12N_66     | AL12 |
| PL_DDR4_A13   | IO_L4N_T0U_N7_DBC_AD7N_66  | AN8  |
| PL_DDR4_ODT   | IO_L16P_T2U_N6_QBC_AD3P_66 | AG9  |
| PL_DDR4_RAS_B | IO_L8P_T1L_N2_AD5P_66      | AL11 |
| PL_DDR4_RST   | IO_L14P_T2L_N2_GC_66       | AH11 |
| PL_DDR4_WE_B  | IO_L15N_T2L_N5_AD11N_66    | AH13 |
| PL_DDR4_ACT_B | IO_L16N_T2U_N7_QBC_AD3N_66 | AH9  |
| PL_DDR4_BA0   | IO_L7N_T1L_N1_QBC_AD13N_66 | AL13 |
| PL_DDR4_BA1   | IO_L3P_T0L_N4_AD15P_66     | AN11 |
| PL_DDR4_BG0   | IO_L7P_T1L_N0_QBC_AD13P_66 | AK13 |
| PL_DDR4_CAS_B | IO_L8N_T1L_N3_AD5N_66      | AL10 |

|               |                          |      |
|---------------|--------------------------|------|
| PL_DDR4_CKE   | IO_L15P_T2L_N4_AD11P_66  | AG13 |
| PL_DDR4_CS_B  | IO_L9P_T1L_N4_AD12P_66   | AK12 |
| PL_DDR4_CLK_N | IO_L13N_T2L_N1_GC_QBC_66 | AJ12 |
| PL_DDR4_CLK_P | IO_L13P_T2L_N0_GC_QBC_66 | AH12 |

## Part 1.4: QSPI Flash

The FPGA core board ACU7EVC is equipped with two 256MBit Quad-SPI FLASH chip to form an 8-bit bandwidth data bus, the flash model is MT25QU256ABA1EW9, which uses the 1.8V CMOS voltage standard. Due to the non-volatile nature of QSPI FLASH, it can be used as a boot device for the system to store the boot image of the system. These images mainly include FPGA bit files, ARM application code, and other user data files. The specific models and related parameters of QSPI FLASH are shown in Table 2-4-1.

| Position | Model            | Capacity | Factory |
|----------|------------------|----------|---------|
| U2, U3   | MT25QU256ABA1EW9 | 256Mbit  | Winbond |

Table 2-4-1: QSPI FLASH Specification

QSPI FLASH is connected to the GPIO port of the BANK500 in the PS section of the ZYNQ chip. In the system design, the GPIO port functions of these PS ports need to be configured as the QSPI FLASH interface. Figure 2-4-1 shows the QSPI Flash in the schematic.



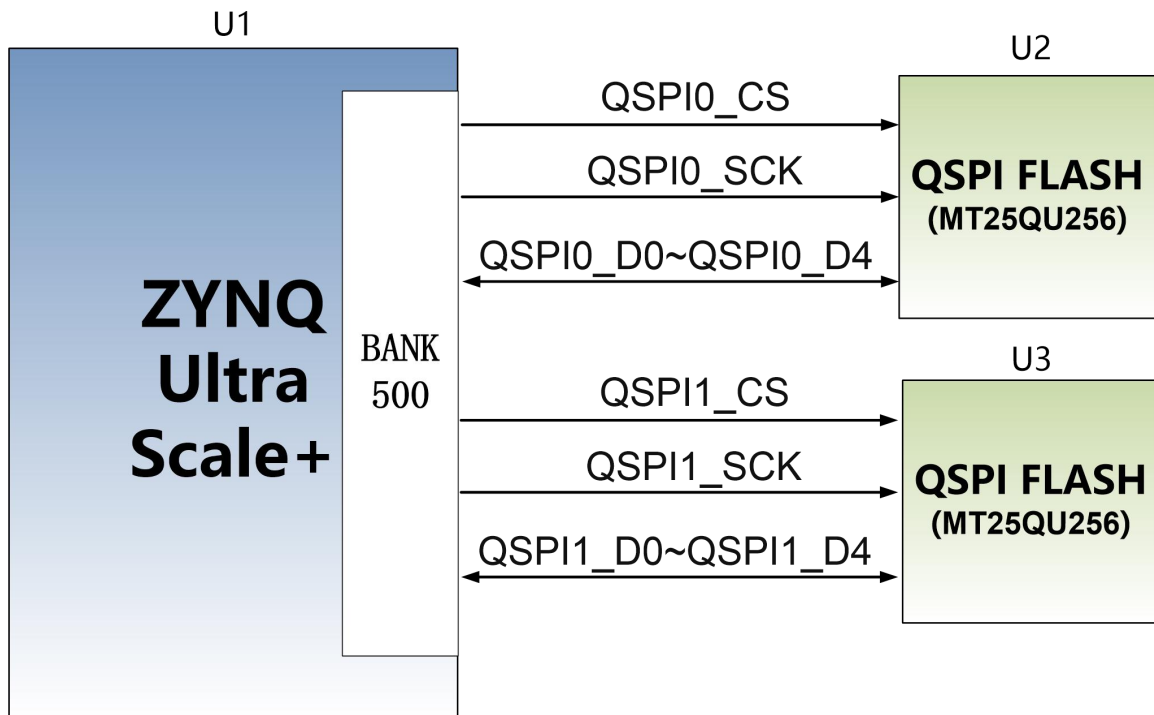


Figure 2-4-1: QSPI Flash in the schematic

**Configure chip pin assignments:**

| Signal Name      | Pin Name     | Pin Number |
|------------------|--------------|------------|
| MIO0_QSPI0_SCLK  | PS_MIO0_500  | A24        |
| MIO1_QSPI0_IO1   | PS_MIO1_500  | C24        |
| MIO2_QSPI0_IO2   | PS_MIO2_500  | B24        |
| MIO3_QSPI0_IO3   | PS_MIO3_500  | E25        |
| MIO4_QSPI0_IO0   | PS_MIO4_500  | A25        |
| MIO5_QSPI0_SS_B  | PS_MIO5_500  | D25        |
| MIO10_QSPI1_IO2  | PS_MIO10_500 | F26        |
| MIO11_QSPI1_IO3  | PS_MIO11_500 | B26        |
| MIO12_QSPI1_SCLK | PS_MIO12_500 | C27        |
| MIO7_QSPI1_SS_B  | PS_MIO7_500  | B25        |
| MIO8_QSPI1_IO0   | PS_MIO8_500  | D26        |
| MIO9_QSPI1_IO1   | PS_MIO9_500  | C26        |

**Part 1.5: eMMC Flash**

The ACU7EVC core board is equipped with a large-capacity 8GB eMMC

FLASH chip, the model is MTFC8GAKAJCN-4M, it supports the HS-MMC interface of the JEDEC e-MMC V5.0 standard, and the level supports 1.8V or 3.3V. The data width of eMMC FLASH and ZYNQ connection is 8bit. Due to the large-capacity and non-volatile characteristics of eMMC FLASH, it can be used as a large-capacity storage device in the ZYNQ system, such as storing ARM applications, system files and other user data files The specific models and related parameters of eMMC FLASH are shown in Table 2-5-1.

| Position | Model           | Capacity | Factory |
|----------|-----------------|----------|---------|
| U19      | MTFC8GAKAJCN-4M | 8G Byte  | Micron  |

Table 2-5-1: eMMC FLASH Specification

The eMMC FLASH is connected to the GPIO port of the BANK500 of the PS part of the ZYNQ UltraScale+. In the system design, it is necessary to configure the GPIO port function of the PS side as an EMMC interface. Figure 2-5-1 shows the part of eMMC Flash in the schematic diagram.

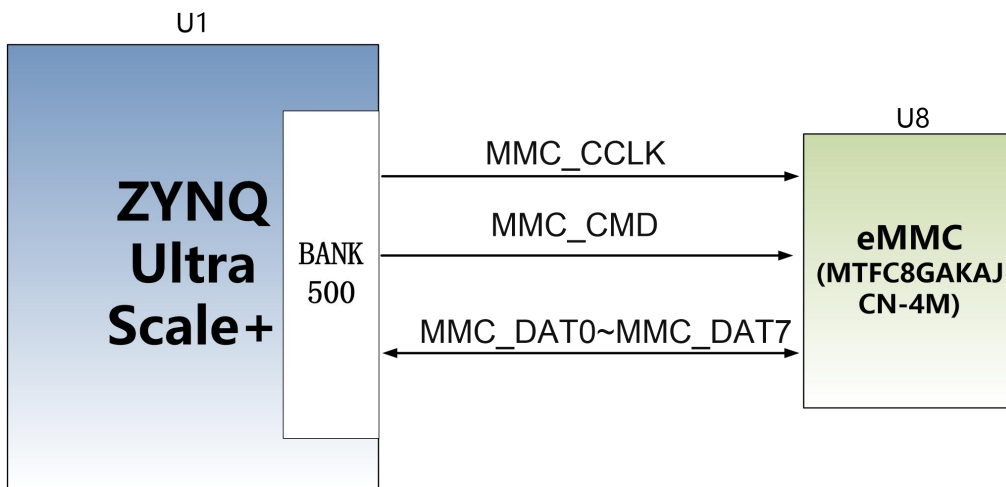


Figure 2-5-1: eMMC Flash in the schematic

**Configuration Chip pin assignment:**

| Signal Name | Pin Name     | Pin Number |
|-------------|--------------|------------|
| MMC_CCLK    | PS_MIO22_500 | F28        |
| MMC_CMD     | PS_MIO21_500 | C28        |
| MMC_DAT0    | PS_MIO13_500 | D27        |

|          |              |     |
|----------|--------------|-----|
| MMC_DAT1 | PS_MIO14_500 | A27 |
| MMC_DAT2 | PS_MIO15_500 | E27 |
| MMC_DAT3 | PS_MIO16_500 | A28 |
| MMC_DAT4 | PS_MIO17_500 | C29 |
| MMC_DAT5 | PS_MIO18_500 | F27 |
| MMC_DAT6 | PS_MIO19_500 | B28 |
| MMC_DAT7 | PS_MIO20_500 | E29 |
| MMC_RSTN | PS_MIO23_500 | B29 |

## Part 1.6: Clock configuration

The core board provides reference clock and RTC real-time clock for PS system and PL logic respectively, so that PS system and PL logic can work independently. The schematic diagram of the clock circuit design is shown in Figure 2-6-1:


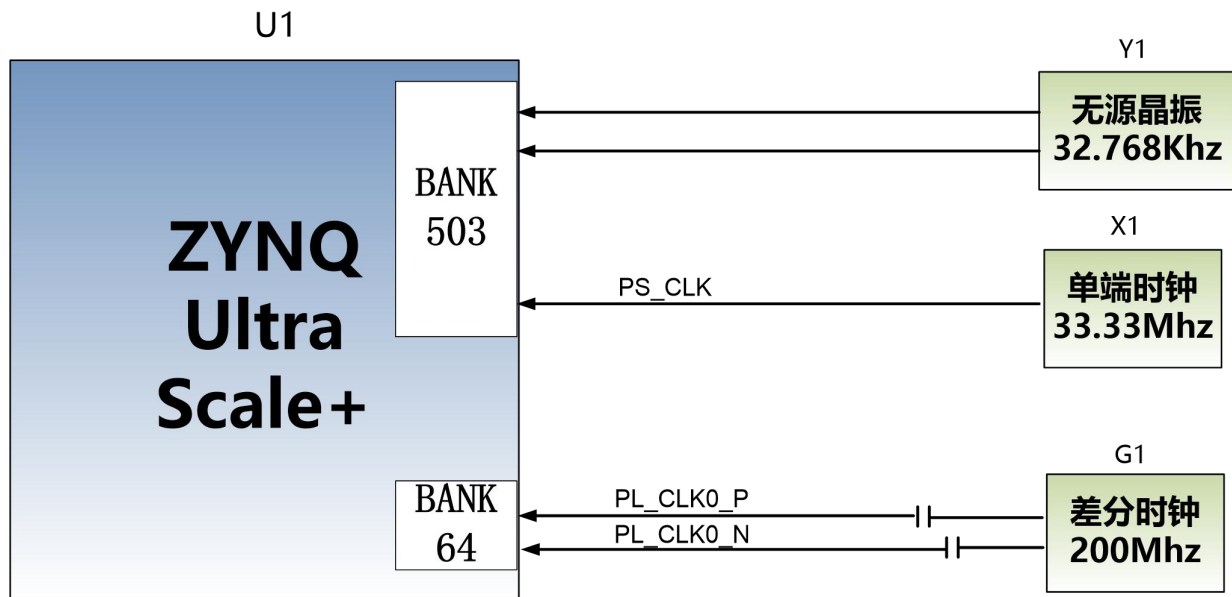


Figure 2-6-1: Core Board Clock Source


## Part 1.7: Power Supply

The power supply voltage of the ACU7EVC core board is DC12V, which is supplied by connecting the carrier board. The core board uses 2 MYMGM1R824 power chips in parallel to achieve a 50A current to provide the

core power of the XCZU7EV with 0.85V. In addition, a PMIC chip TPS6508640 is used to generate all other power supplies required by the XCZU7EV chip. For the TPS6508640 power supply design, please refer to the power supply chip manual. The design block diagram is as follows :

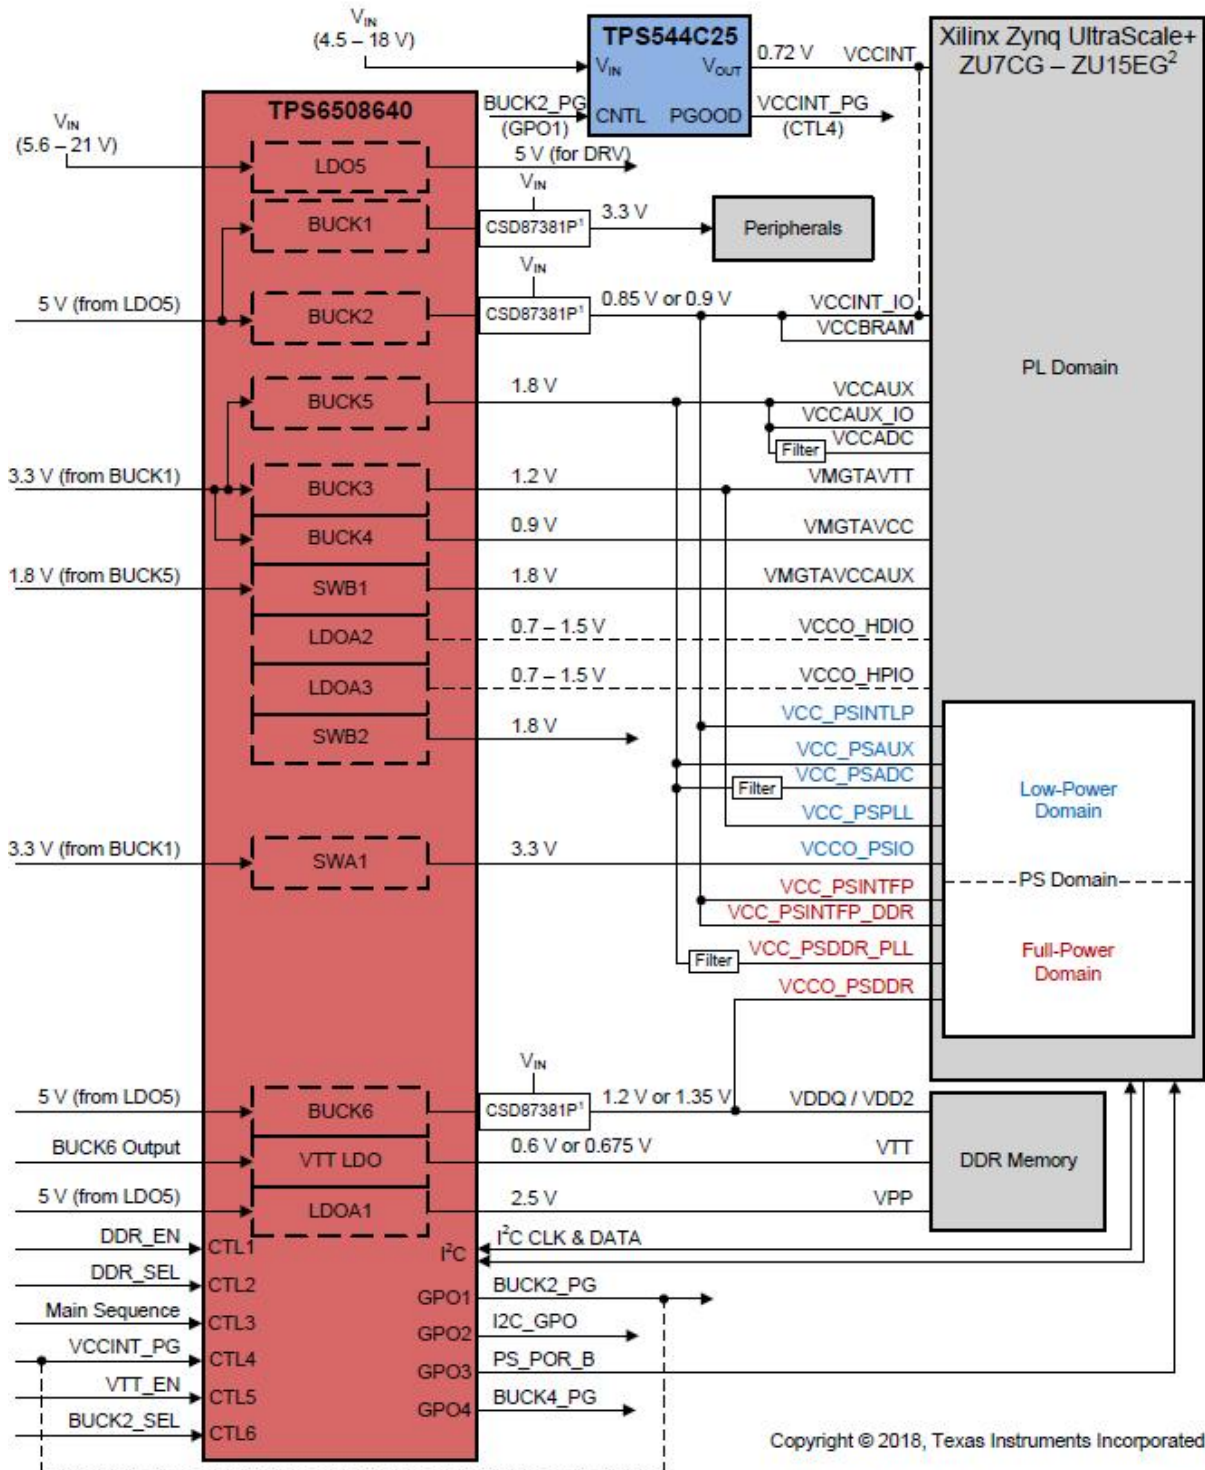

The BANK28, BANK64, and BANK65 levels of the XCZU7EV chip are powered by the LDO alone, which can change the voltage by replacing the LDO chip (up to 1.8V support).

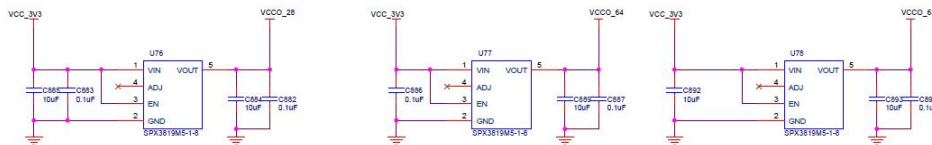

## Part 1.8: ACU7EVC Core Board Size Dimension

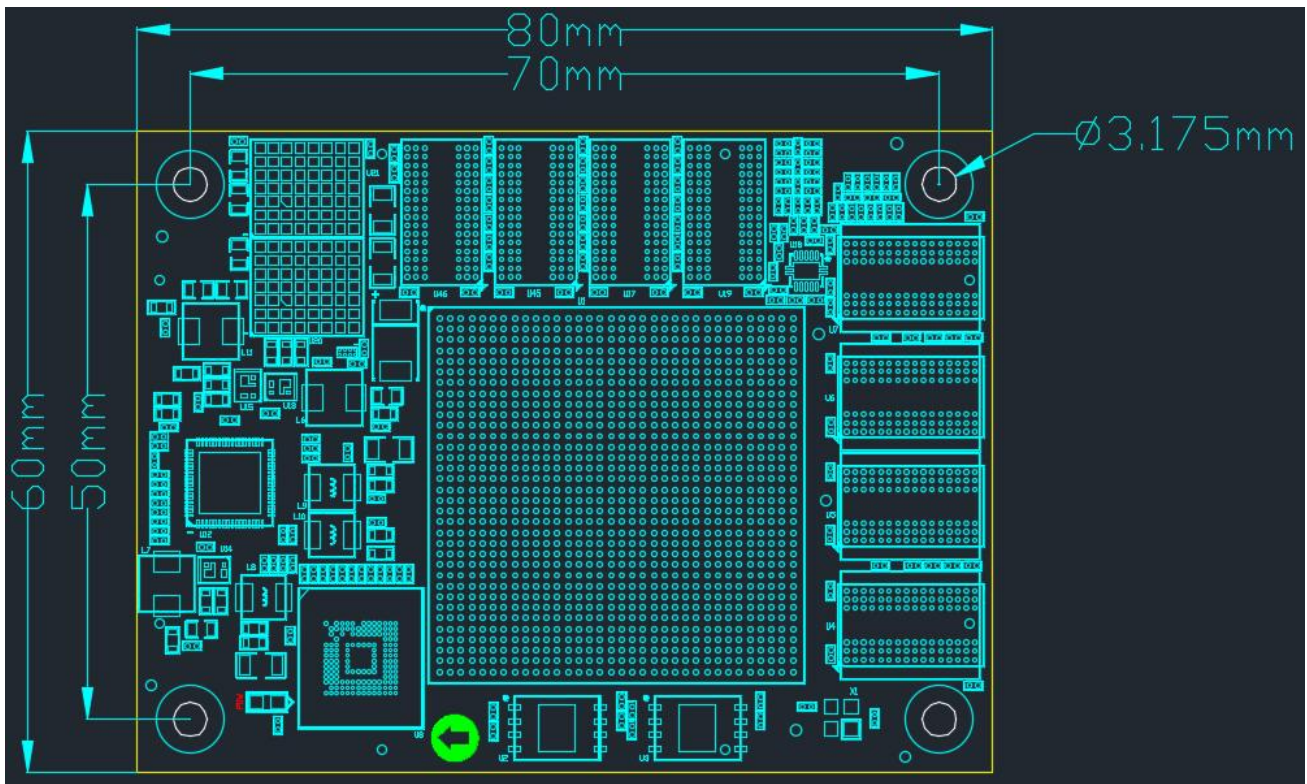


Figure 2-8-1: ACU7EVC Core Board Size Dimension

## Part 1.9: Board to Board Connectors pin assignment

The core board has a total of four high-speed expansion ports. It uses four 120-pin inter-board connectors (J29/J30/J31/J32) to connect to the carrier board. The connectors used is Panasonic AXK5A2137YG, and the corresponding connector model in the carrier board is Panasonic

AXK6A2337YG.

## J29 connector

J29 connects to +12V power supply, the IO of BANK28, BANK87, BANK88.

the level standard of BANK87, 88 is 3.3V, the level standard of BANK28 is 1.8V,  
The Level of PS MIO is +1.8V.

## Pin assignment of board to board connector J29

| J29 Pin | Signal Name | Pin Number | J29 Pin | Signal Name | Pin Number |
|---------|-------------|------------|---------|-------------|------------|
| 1       | +12V        |            | 2       | +12V        |            |
| 3       | +12V        |            | 4       | +12V        |            |
| 5       | +12V        |            | 6       | +12V        |            |
| 7       | +12V        |            | 8       | +12V        |            |
| 9       | +12V        |            | 10      | +12V        |            |
| 11      | +12V        |            | 12      | +12V        |            |
| 13      | GND         |            | 14      | GND         |            |
| 15      | B88_L2_N    | B1         | 16      | B88_L1_N    | D1         |
| 17      | B88_L2_P    | C1         | 18      | B88_L1_P    | E1         |
| 19      | GND         |            | 20      | GND         |            |
| 21      | B88_L5_N    | C2         | 22      | B88_L4_N    | E2         |
| 23      | B88_L5_P    | D2         | 24      | B88_L4_P    | E3         |
| 25      | B88_L8_N    | D4         | 26      | B88_L3_N    | A2         |
| 27      | B88_L8_P    | E4         | 28      | B88_L3_P    | A3         |
| 29      | GND         |            | 30      | GND         |            |
| 31      | B88_L7_N    | B4         | 32      | B88_L6_N    | B3         |
| 33      | B88_L7_P    | C4         | 34      | B88_L6_P    | C3         |
| 35      | B88_L9_N    | F4         | 36      | B88_L10_N   | A5         |
| 37      | B88_L9_P    | F5         | 38      | B88_L10_P   | B5         |
| 39      | GND         |            | 40      | GND         |            |
| 41      | B88_L11_N   | D5         | 42      | B88_L12_N   | E5         |
| 43      | B88_L11_P   | D6         | 44      | B88_L12_P   | F6         |
| 45      | B87_L9_N    | J6         | 46      | B87_L10_N   | G6         |
| 47      | B87_L9_P    | J7         | 48      | B87_L10_P   | H6         |
| 49      | GND         |            | 50      | GND         |            |

|     |           |     |     |           |     |
|-----|-----------|-----|-----|-----------|-----|
| 51  | B87_L11_N | G7  | 52  | B87_L3_N  | M12 |
| 53  | B87_L11_P | H7  | 54  | B87_L3_P  | N13 |
| 55  | B87_L5_N  | M8  | 56  | B87_L12_N | G8  |
| 57  | B87_L5_P  | M9  | 58  | B87_L12_P | H8  |
| 59  | GND       |     | 60  | GND       |     |
| 61  | B87_L8_N  | J9  | 62  | B87_L7_N  | K8  |
| 63  | B87_L8_P  | K9  | 64  | B87_L7_P  | L8  |
| 65  | B87_L2_N  | N8  | 66  | B87_L6_N  | L10 |
| 67  | B87_L2_P  | N9  | 68  | B87_L6_P  | M10 |
| 69  | GND       |     | 70  | GND       |     |
| 71  | B87_L4_N  | M11 | 72  | B28_L7_N  | D19 |
| 73  | B87_L4_P  | N11 | 74  | B28_L7_P  | E19 |
| 75  | B28_L20_N | C19 | 76  | B28_L9_N  | D21 |
| 77  | B28_L20_P | C18 | 78  | B28_L9_P  | D20 |
| 79  | GND       |     | 80  | GND       |     |
| 81  | B28_L19_N | A19 | 82  | B28_L10_N | F20 |
| 83  | B28_L19_P | A18 | 84  | B28_L10_P | G20 |
| 85  | B28_L21_N | A21 | 86  | B28_L22_N | B19 |
| 87  | B28_L21_P | A20 | 88  | B28_L22_P | B18 |
| 89  | GND       |     | 90  | GND       |     |
| 91  | B28_L24_N | B21 | 92  | B28_L15_N | C22 |
| 93  | B28_L24_P | B20 | 94  | B28_L15_P | C21 |
| 95  | B28_L23_N | A23 | 96  | B28_L17_N | C23 |
| 97  | B28_L23_P | A22 | 98  | B28_L17_P | D22 |
| 99  | GND       |     | 100 | GND       |     |
| 101 | PS_MIO43  | E30 | 102 | -         | -   |
| 103 | PS_MIO26  | A29 | 104 | PS_MIO32  | B31 |
| 105 | PS_MIO27  | A30 | 106 | PS_MIO35  | C31 |
| 107 | PS_MIO31  | B30 | 108 | PS_MIO36  | C32 |
| 109 | PS_MIO40  | D31 | 110 | PS_MIO37  | C33 |
| 111 | PS_MIO44  | E32 | 112 | PS_MIO29  | A32 |
| 113 | PS_MIO39  | D30 | 114 | PS_MIO30  | A33 |
| 115 | PS_MIO33  | B33 | 116 | PS_MIO34  | B34 |
| 117 | PS_MIO41  | D32 | 118 | PS_MIO42  | D34 |

|     |          |     |     |          |     |
|-----|----------|-----|-----|----------|-----|
| 119 | PS_MIO28 | A31 | 120 | PS_MIO38 | C34 |
|-----|----------|-----|-----|----------|-----|

### Pin assignment of board to board connector J30

J30 connects the transceiver signal of bank505 Mgt, Mio of part PS and bank28. **The default level standard of bank28 is 1.8V. The Mio level of PS is 1.8V standard.**

| J30 Pin | Signal Name | Pin Number | J30 Pin | Signal Name | Pin Number |
|---------|-------------|------------|---------|-------------|------------|
| 1       | B28_L16_P   | E24        | 2       | SD_D2       | F31        |
| 3       | B28_L16_N   | D24        | 4       | SD_D3       | F32        |
| 5       | GND         |            | 6       | GND         |            |
| 7       | B28_L11_N   | E22        | 8       | SD_CMD      | F33        |
| 9       | B28_L11_P   | F22        | 10      | SD_D0       | E34        |
| 11      | B28_L13_P   | F23        | 12      | SD_D1       | F30        |
| 13      | B28_L13_N   | E23        | 14      | SD_CLK      | F34        |
| 15      | GND         |            | 16      | GND         |            |
| 17      | B28_L12_N   | F21        | 18      | SD_CD       | E33        |
| 19      | B28_L12_P   | G21        | 20      |             |            |
| 21      | B28_L3_P    | J21        | 22      | USB_STP     | H31        |
| 23      | B28_L3_N    | J22        | 24      | USB_DIR     | G30        |
| 25      | GND         |            | 26      | GND         |            |
| 27      | B28_L8_P    | H21        | 28      | USB_CLK     | G29        |
| 29      | B28_L8_N    | H22        | 30      | USB_NXT     | G33        |
| 31      |             |            | 32      | USB_DATA0   | G34        |
| 33      |             |            | 34      | USB_DATA1   | H29        |
| 35      | GND         |            | 36      | GND         |            |
| 37      | B28_L18_N   | G26        | 38      | USB_DATA2   | G31        |
| 39      | B28_L18_P   | G25        | 40      | USB_DATA3   | H32        |
| 41      | B28_L14_N   | G24        | 42      | USB_DATA4   | H33        |
| 43      | B28_L14_P   | G23        | 44      | USB_DATA5   | H34        |
| 45      | GND         |            | 46      | GND         |            |
| 47      |             |            | 48      | USB_DATA6   | J29        |
| 49      |             |            | 50      | USB_DATA7   | J30        |



|     |            |     |     |            |     |
|-----|------------|-----|-----|------------|-----|
| 51  |            |     | 52  | PHY1_TXD0  | J32 |
| 53  |            |     | 54  | PHY1_TXD1  | J34 |
| 55  | GND        |     | 56  | GND        |     |
| 57  |            |     | 58  | PHY1_TXD2  | K28 |
| 59  |            |     | 60  | PHY1_TXD3  | K29 |
| 61  | PS_POR_B   | M24 | 62  | PHY1_TXCK  | J31 |
| 63  | FPGA_DONE  | N24 | 64  | PHY1_TXCTL | K30 |
| 65  | GND        |     | 66  | GND        |     |
| 67  | PS_MODE3   | K25 | 68  | PHY1_RXD3  | L29 |
| 69  | PS_MODE2   | K26 | 70  | PHY1_RXD2  | K34 |
| 71  | PS_MODE1   | J26 | 72  | PHY1_RXD1  | K33 |
| 73  | PS_MODE0   | H27 | 74  | PHY1_RXD0  | K32 |
| 75  | GND        |     | 76  | GND        |     |
| 77  | FPGA_TCK   | K27 | 78  | PHY1_RXCTL | L30 |
| 79  | FPGA_TDI   | J27 | 80  | PHY1_RXCK  | K31 |
| 81  | FPGA_TMS   | H28 | 82  | PHY1_MDC   | L33 |
| 83  | FPGA_TDO   | G28 | 84  | PHY1_MDIO  | L34 |
| 85  | GND        |     | 86  | GND        |     |
| 87  | 505_RX3_N  | N34 | 88  | 505_TX3_N  | N30 |
| 89  | 505_RX3_P  | N33 | 90  | 505_TX3_P  | N29 |
| 91  | GND        |     | 92  | GND        |     |
| 93  | 505_RX2_N  | R34 | 94  | 505_TX2_N  | P32 |
| 95  | 505_RX2_P  | R33 | 96  | 505_TX2_P  | P31 |
| 97  | GND        |     | 98  | GND        |     |
| 99  | 505_RX1_N  | T32 | 100 | 505_TX1_N  | R30 |
| 101 | 505_RX1_P  | T31 | 102 | 505_TX1_P  | R29 |
| 103 | GND        |     | 104 | GND        |     |
| 105 | 505_RX0_N  | U34 | 106 | 505_TX0_N  | U30 |
| 107 | 505_RX0_P  | U33 | 108 | 505_TX0_P  | U29 |
| 109 | GND        |     | 110 | GND        |     |
| 111 | 505_CLK0_N | T28 | 112 | 505_CLK1_N | P28 |
| 113 | 505_CLK0_P | T27 | 114 | 505_CLK1_P | P27 |
| 115 | GND        |     | 116 | GND        |     |
| 117 | 505_CLK2_N | M28 | 118 | 505_CLK3_N | M32 |

|     |            |     |     |            |     |
|-----|------------|-----|-----|------------|-----|
| 119 | 505_CLK2_P | M27 | 120 | 505_CLK3_P | M31 |
|-----|------------|-----|-----|------------|-----|

### Pin assignment of board to board connector J31

J31 connects the IO of BANK64, BANK65, **the level standard of BANK66, 67 is +1.8V.**

| J31 Pin | Signal Name | Pin Number | J31 Pin | Signal Name | Pin Number |
|---------|-------------|------------|---------|-------------|------------|
| 1       | POWER_SW    |            | 2       | VBAT_IN     | Y23        |
| 3       | B65_L24_N   | AA20       | 4       | B65_L2_N    | AN19       |
| 5       | B65_L24_P   | AA19       | 6       | B65_L2_P    | AM19       |
| 7       | B65_L13_N   | AH23       | 8       | B65_L18_N   | AE24       |
| 9       | B65_L13_P   | AH22       | 10      | B65_L18_P   | AE23       |
| 11      | GND         |            | 12      | GND         |            |
| 13      | B65_L8_N    | AL23       | 14      | B65_L16_N   | AG23       |
| 15      | B65_L8_P    | AL22       | 16      | B65_L16_P   | AF23       |
| 17      | B65_L12_N   | AJ22       | 18      | B65_L3_N    | AP22       |
| 19      | B65_L12_P   | AJ21       | 20      | B65_L3_P    | AP21       |
| 21      | GND         |            | 22      | GND         |            |
| 23      | B65_L5_N    | AP23       | 24      | B65_L7_N    | AL21       |
| 25      | B65_L5_P    | AN22       | 26      | B65_L7_P    | AL20       |
| 27      | B65_L10_N   | AK23       | 28      | B65_L21_N   | AE20       |
| 29      | B65_L10_P   | AK22       | 30      | B65_L21_P   | AD20       |
| 31      | GND         |            | 32      | GND         |            |
| 33      | B65_L14_N   | AH21       | 34      | B65_L6_N    | AN23       |
| 35      | B65_L14_P   | AG21       | 36      | B65_L6_P    | AM23       |
| 37      | B65_L19_N   | AE19       | 38      | B65_L17_N   | AF22       |
| 39      | B65_L19_P   | AE18       | 40      | B65_L17_P   | AF21       |
| 41      | GND         |            | 42      | GND         |            |
| 43      | B65_L15_N   | AG20       | 44      | B65_L4_N    | AN21       |
| 45      | B65_L15_P   | AG19       | 46      | B65_L4_P    | AM21       |
| 47      | B65_L20_N   | AC19       | 48      | B65_L11_N   | AK20       |
| 49      | B65_L20_P   | AB19       | 50      | B65_L11_P   | AJ20       |
| 51      | GND         |            | 52      | GND         |            |
| 53      | B65_L23_N   | AD19       | 54      | B65_L1_N    | AP20       |
| 55      | B65_L23_P   | AC18       | 56      | B65_L1_P    | AP19       |

|     |           |      |     |           |      |
|-----|-----------|------|-----|-----------|------|
| 57  | B65_L22_N | AB18 | 58  | B65_L9_N  | AK19 |
| 59  | B65_L22_P | AA18 | 60  | B65_L9_P  | AJ19 |
| 61  | GND       |      | 62  | GND       |      |
| 63  | B64_L1_P  | AP18 | 64  | B64_L9_P  | AK18 |
| 65  | B64_L1_N  | AP17 | 66  | B64_L9_N  | AL18 |
| 67  | B64_L6_P  | AN17 | 68  | B64_L14_P | AF18 |
| 69  | B64_L6_N  | AN16 | 70  | B64_L14_N | AG18 |
| 71  | GND       |      | 72  | GND       |      |
| 73  | B64_L5_P  | AP16 | 74  | B64_L11_P | AJ17 |
| 75  | B64_L5_N  | AP15 | 76  | B64_L11_N | AK17 |
| 77  | B64_L3_P  | AM18 | 78  | B64_L4_P  | AM14 |
| 79  | B64_L3_N  | AN18 | 80  | B64_L4_N  | AN14 |
| 81  | GND       |      | 82  | GND       |      |
| 83  | B64_L24_P | AD17 | 84  | B64_L2_P  | AN13 |
| 85  | B64_L24_N | AD16 | 86  | B64_L2_N  | AP13 |
| 87  | B64_L21_P | AB16 | 88  | B64_L8_P  | AL16 |
| 89  | B64_L21_N | AB15 | 90  | B64_L8_N  | AL15 |
| 91  | GND       |      | 92  | GND       |      |
| 93  | B64_L7_P  | AM16 | 94  | B64_L12_P | AJ16 |
| 95  | B64_L7_N  | AM15 | 96  | B64_L12_N | AJ15 |
| 97  | B64_L10_P | AK15 | 98  | B64_L16_P | AH14 |
| 99  | B64_L10_N | AK14 | 100 | B64_L16_N | AJ14 |
| 101 | GND       |      | 102 | GND       |      |
| 103 | B64_L20_P | AC17 | 104 | B64_L15_P | AE17 |
| 105 | B64_L20_N | AC16 | 106 | B64_L15_N | AF17 |
| 107 | B64_L18_P | AG15 | 108 | B64_L17_P | AF16 |
| 109 | B64_L18_N | AG14 | 110 | B64_L17_N | AF15 |
| 111 | GND       |      | 112 | GND       |      |
| 113 | B64_L22_P | AA16 | 114 | B64_L19_P | AD15 |
| 115 | B64_L22_N | AA15 | 116 | B64_L19_N | AE15 |
| 117 | B64_L13_P | AH18 | 118 | B64_L23_P | AA14 |
| 119 | B64_L13_N | AH17 | 120 | B64_L23_N | AB14 |

### Pin assignment of board to board connector J32

J32 connects to the the transceiver signal of BANK223, 224, 225,226

| J32 Pin | Signal Name | Pin Number | J32 Pin | Signal Name | Pin Number |
|---------|-------------|------------|---------|-------------|------------|
| 1       | 223_RX0_P   | AP4        | 2       | 223_TX0_P   | AN6        |
| 3       | 223_RX0_N   | AP3        | 4       | 223_TX0_N   | AN5        |
| 5       | GND         |            | 6       | GND         |            |
| 7       | 223_RX1_P   | AN2        | 8       | 223_TX1_P   | AM4        |
| 9       | 223_RX1_N   | AN1        | 10      | 223_TX1_N   | AM3        |
| 11      | GND         |            | 12      | GND         |            |
| 13      | 223_RX2_P   | AL2        | 14      | 223_TX2_P   | AL6        |
| 15      | 223_RX2_N   | AL1        | 16      | 223_TX2_N   | AL5        |
| 17      | GND         |            | 18      | GND         |            |
| 19      | 223_RX3_P   | AK4        | 20      | 223_TX3_P   | AJ6        |
| 21      | 223_RX3_N   | AK3        | 22      | 223_TX3_N   | AJ5        |
| 23      | GND         |            | 24      | GND         |            |
| 25      | 223_CLK1_P  | AC10       | 26      | 223_CLK0_P  | AD8        |
| 27      | 223_CLK1_N  | AC9        | 28      | 223_CLK0_N  | AD7        |
| 29      | GND         |            | 30      | GND         |            |
| 31      | 224_RX0_P   | AJ2        | 32      | 224_TX0_P   | AH4        |
| 33      | 224_RX0_N   | AJ1        | 34      | 224_TX0_N   | AH3        |
| 35      | GND         |            | 36      | GND         |            |
| 37      | 224_RX1_P   | AG2        | 38      | 224_TX1_P   | AG6        |
| 39      | 224_RX1_N   | AG1        | 40      | 224_TX1_N   | AG5        |
| 41      | GND         |            | 42      | GND         |            |
| 43      | 224_RX2_P   | AF4        | 44      | 224_TX2_P   | AE6        |
| 45      | 224_RX2_N   | AF3        | 46      | 224_TX2_N   | AE5        |
| 47      | GND         |            | 48      | GND         |            |
| 49      | 224_RX3_P   | AE2        | 50      | 224_TX3_P   | AD4        |
| 51      | 224_RX3_N   | AE1        | 52      | 224_TX3_N   | AD3        |
| 53      | GND         |            | 54      | GND         |            |
| 55      | 224_CLK1_P  | AA10       | 56      | 224_CLK0_P  | AB8        |
| 57      | 224_CLK1_N  | AA9        | 58      | 224_CLK0_N  | AB7        |
| 59      | GND         |            | 60      | GND         |            |
| 61      | 225_CLK1_P  | W10        | 62      | 225_CLK0_P  | Y8         |
| 63      | 225_CLK1_N  | W9         | 64      | 225_CLK0_N  | Y7         |
| 65      | GND         |            | 66      | GND         |            |
| 67      | 225_RX1_P   | AB4        | 68      | 225_RX0_P   | AC2        |
| 69      | 225_RX1_N   | AB3        | 70      | 225_RX0_N   | AC1        |

|     |            |     |     |            |     |
|-----|------------|-----|-----|------------|-----|
| 71  | GND        |     | 72  | GND        |     |
| 73  | 225_TX1_P  | AA6 | 74  | 225_TX0_P  | AC6 |
| 75  | 225_TX1_N  | AA5 | 76  | 225_TX0_N  | AC5 |
| 77  | GND        |     | 78  | GND        |     |
| 79  | 225_RX2_P  | AA2 | 80  | 225_RX3_P  | W2  |
| 81  | 225_RX2_N  | AA1 | 82  | 225_RX3_N  | W1  |
| 83  | GND        |     | 84  | GND        |     |
| 85  | 225_TX2_P  | Y4  | 86  | 225_TX3_P  | W6  |
| 87  | 225_TX2_N  | Y3  | 88  | 225_TX3_N  | W5  |
| 89  | GND        |     | 90  | GND        |     |
| 91  | 226_CLK0_P | V8  | 92  | 226_CLK1_P | U10 |
| 93  | 226_CLK0_N | V7  | 94  | 226_CLK1_N | U9  |
| 95  | GND        |     | 96  | GND        |     |
| 97  | 226_RX3_P  | P4  | 98  | 226_TX3_P  | N6  |
| 99  | 226_RX3_N  | P3  | 100 | 226_TX3_N  | N5  |
| 101 | GND        |     | 102 | GND        |     |
| 103 | 226_RX2_P  | R2  | 104 | 226_TX2_P  | R6  |
| 105 | 226_RX2_N  | R1  | 106 | 226_TX2_N  | R5  |
| 107 | GND        |     | 108 | GND        |     |
| 109 | 226_RX1_P  | U2  | 110 | 226_TX1_P  | T4  |
| 111 | 226_RX1_N  | U1  | 112 | 226_TX1_N  | T3  |
| 113 | GND        |     | 114 | GND        |     |
| 115 | 226_RX0_P  | V4  | 116 | 226_TX0_P  | U6  |
| 117 | 226_RX0_N  | V3  | 118 | 226_TX0_N  | U5  |
| 119 | GND        |     | 120 | GND        |     |